

# highest quality state of the art CUSTOMER QUALITY PRECISION


# TMH-F

## CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	$\varnothing$	1/2 BSP
	PRESS.	Min.	1 bar 15 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	$\varnothing$	3/8 BSP
SHAFT		$\varnothing$	HOLLOW 1" 1/8
OIL		SAE 75W 90	0.7 litri 0.18 U.S.G.
PESO WEIGHT		Kg lbs	10.8 / 23.7



**M** - NEMA 184TC-1"1/8

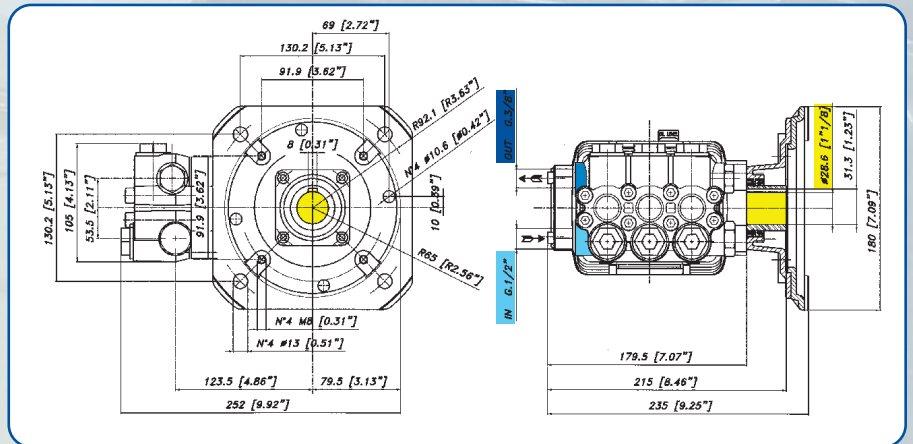

## CARATTERISTICHE - FEATURES

TMH-F 3450 rpm

## PERFORMANCE CHART

CODICE CODE	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER		PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP		
07.1500.97.A	TMH 3035 F	210	3000	13.2	3.5	5.5	7.5	15	8.6
07.1501.97.A	TMH 4035 F	280	4000	13.2	3.5	7	9.5		
07.1502.97.A	TMH 2740 F	185	2700	15.2	4	5.5	7.5	15	9.8
07.1503.97.A	TMH 4040 F	280	4000	15.2	4	8.1	11		
07.1504.97.A	TMH 3045 F	210	3000	17	4.5	7.4	10	15	11.2
07.1505.97.A	TMH 4045 F	280	4000	17	4.5	9.2	12.5		
07.1506.97.A	TMH 2950 F	200	2900	19	5	7.4	10	15	12.4
07.1507.97.A	TMH 4050 F	280	4000	19	5	10	13.5		
07.1508.97.A	TMH 2460 F	170	2400	22	6	7.4	10	15	15.4
07.1509.97.A	TMH 3560 F	240	3500	22	6	10.7	14.5		